HANNspree

HO 320 HTB 32" Open Frame Touch Monitor

Experts in **Display**

Open Frame Touch Monitor HO 320 HTB

31.5" / 80cm Diagonal LED Backlight – Format 16:9

- 1920 x 1080 Full HD 1080P Resolution
- 10-Point Touch P-Cap Technology
- 178° / 178° Ultra Wide Viewing Angle
- 1400:1 High Contrast Ratio
- Video Input: HDMI + VGA
- IP54 (front) Rating Level
- Display Protection: Thickness 4mm
- Multiple Mounting Options
- ≥6H Toughened Hard Panel Surface
- Slim Profile with Narrow Edges
- Edge to Edge glass without raised frame
- Touch-Through Glass (available upon request*)





31.5" / 80 cm

Part. No..: HO 320 HTB

SIZE, RESOLUTION



32"

16:9 Aspect Ratio



HDMI VGA

CONNECTIVITY, IP LEVEL



178 Ultra-Wide Viewing Angle

VIEWING ANGLE, TOUCH



OTHER FEATURES

Low Power Consumption



Full HD 1920 x 1080



IP 54 Water & Dust Protection



10 Point Touch



30.000 Hours Lifetime

Technical Specifications >>>

* For more details contact your local HSP office / representative or send us a request via the product enquiry form on the website.



HO 320 HTB 32" Open Frame Touch Monitor

Experts in **Display**

Display Size	80 cm / 31.5" Diagonal	
Panel Type	TFT – LED Backlight	
Aspect Ratio	16:9	
Resolution (H x V)	1920 x 1080 Full HD	
Brightness (Typ.)	350cd/m² Panel / 300 cd/m² Monitor	
Contrast (Typ.)	1.400:1 (Typical)	
Display Area	698,4 x 392,85 mm	
Viewing Angle L/R; U/D	178° H / 178° V	
Response Time	8 msec	
Pixel Pitch	0,364 (H) x 0,364 (V) mm	
Touch Type	Projected Capacitive Type – 10 Point Touch Material Glass + Glass	
Display Colors	16.7M Colors	
Horizontal Frequency	30 ~ 83 kHz	
Vertical Frequency	60 Hz	
Max Display Frequency	1920 x 1080 @ 60Hz	
Input 1	VGA	
Input 2	HDMI	
Input 3	USB Type B (Touch)	
Input 4	-	
Power Consumption	On: 37.71W; Stand-by: 0.3W; Off: -	
AC Power Range	AC 100 ~ 240 Volt; 50 ~ 60 Hz	
Product Dimensions	766 x 54 x 459 mm (W x D x H)	
Packing Dimensions	85 x 24.8 x 57 cm (W x D x H)	
Net / Gross Weight	14 Kg / 16 Kg	

ENERG ©®
HANNSpree HO320HTB (HSG1396
A++ A+ A B C D E
ENERGIA - EHEPPUNR ENEPPEIA - ENERGUA ENERGY - ENERGUE ENERGI U 40 Watt
80,0 31.5 cm inch


VESA Mounting		
Display Protection	Thickness 4±0.3 mm	
Hardness / Transmittance	≥6H Toughened hard panel surface / ≥85%	
IP Rating Level	IP 54 (Front), Water and Dust Protection *	
Controls	Power, Auto, (+), (-), Menu	
LED Backlight life	30.000 hours	
Accessory	Power supply; HDMI Cable (1.5m); USB Cable for Touch.	
Certifications	CE, RoHS	
On Screen Display	9 Languages	

Supplier's Name	HANNspree
Model Name	HO320HTB
Energy Efficiency Class	А
Screen Size (Centimetres)	80
Screen Size (Inches)	31,50
On mode power Consumption (W)	40
Annual Energy Consumption* (kWh)	58
Standby-mode Power Consumption (W)	0,30
Off-mode Power Consumption (W)	-
Screen Resolution	1920 x 1080

PART. NO.: HO 320 HTB



^{© 2020} HANNSpree Europe Holdings B.V. Specifications and design as well as accessories are subject to change without notice. Screen shots are simulated. Actual products may differ slightly from those illustrated on this promotion material. Please refer to actual samples for final selection. The products displayed on this promotion material may not be available for purchase in your particular country or locality. Please check with your local HANNspree authorized representatives for the availability of specific products in your area. All brand, product, Service names and logos are trademarks and/or registered trademarks of their respective manufactures and Companies.

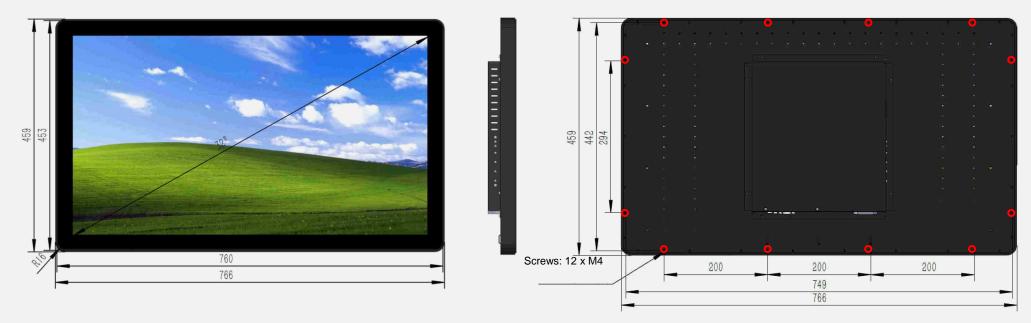

Screw hole spec: 12 x M4 10mm lenght, pitch: 0.7.

