## HS 322 UPB (Model No. HSG1408)

80 cm / 31.5" Diagonal
LED Backlight – Format 16:9

- 31.5" 16:9 LED Backlight Monitor
- 2560 x 1440 WQHD Resolution
- 178° / 178° Ultra-Wide Viewing Angle
- Digital Inputs: HDMI + DP
- Picture In Picture / Picture by Picture
- USB 3.0 HUB, 1 up - 4 down
- Built-In Stereo Speakers
- Tilt and Wall-Mountable (VESA)
- Low Power Consumption
- Multi-Video Modes
- Low Blue Light Mode
- Flicker Free

HDMI Cable in Box

80 cm / 31.5"

Part No.: HS 322 UPB

SIZE, RESOLUTION

32.0" 32"
16:9 Aspect Ratio

2560 x 1440 **2K** WQHD
2560 x 1440

CONNECTIVITY

DP HDMI — HDMI
DP

Stereo — Built-In Speakers

VIEWING ANGLE, VESA

178° — 178° Ultra-Wide Viewing Angle

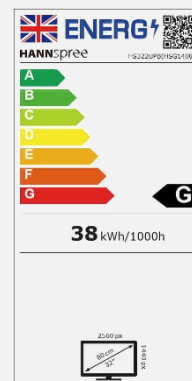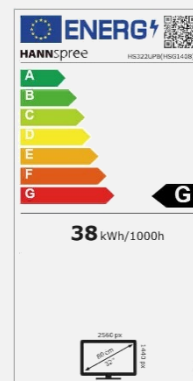VESA — VESA Wall-Mountable

OTHER FEATURES

USB 3.0 HUB — USB 3.0 HUB

Tilt

PIP Picture in Picture — PIP

PBP Picture by Picture — PBP

Display Solutions

Display Size	80cm / 31.5" Diagonal
Panel Type	TFT – LED Backlight
Aspect Ratio	16:9
Resolution (H x V)	2560 x 1440 WQHD
Brightness	350cd/m²
Contrast (Typ.)	1.200:1 (Typical)
Contrast (Active)	80.000.000:1 (Active)
Viewing Angle L/R; U/D	178° H – 178° V (CR >10)
Response Time	5 msec (with OD)
Pixel Pitch	0,272 (H) x 0,272 (V) mm
Panel Surface	Anti-Glare
Display Colors	1.07B Colors
Horizontal Frequency	30 ~ 138 kHz
Vertical Frequency	48 ~ 75 Hz
Max Display Frequency	2560 x 1440 @ 60Hz
Input 1	HDMI 2.0
Input 2	DP 1.2
Audio I/O	Audio In (via HDMI/DP); Audio Out 3.5mm jack
Buil-in Speakers	Yes, 2W x 2; Earphone Jack
Power Consumption	On Mode: 30.91W; Sleep Mode: 0.30W; Off Mode: 0.24W (ETEC Total Energy Consumption. ENERGY STAR® Program Requirements for Displays Version 7.1)
AC Power Range	AC 100 ~ 240 Volt; 50 ~ 65 Hz
Product Dimensions	724,8 x 168,2 x 528,2 mm (W x D x H)
Packing Dimensions	806 x 146 x 514 mm (W x D x H)
Net / Gross Weight	6,6 Kg / 9,3 Kg (±0.3KG)
Bezel & Color Plan	Black texture: front bezel, back cover, arm, base

VESA Mounting	100 x 100 mm
Monitor Stand	Fixed Stand
Tilt / Kensington Lock	-5° ~ 15° / Yes
Pivot / Swivel	- / -
Controls	Menu, (-), (+), AUTO, Power
Color	9300K, 6500K, 5500K, User Modes, Low Blue Light Mode
Preset Mode	PC, Movie, Game, ECO Modes
On Screen Display	11 OSD Languages
Accessory	Power Cable (1,5m); HDMI Cable (1,5m); Warranty Card; Quick Start Guide
Other Features	USB 3.0 HUB (1 Upstream; 4 Downstream) Picture In Picture / Picture by Picture Low Blue Light Mode / Flicker Free

Supplier's Name	HANNspree
Model Name	HS322UPB
Energy efficiency class for standard Dynamic Range (SDR)	G
Annual Energy Power Consumption (kWh/1000h)	38 kWh/1000h
On mode power demand for Standard Dynamic Range (SDR)	38 W
Off mode power demand (W)	0,3 W
Standby mode power demand (W)	0,5 W
Screen Diagonal (cm / inches)	80 cm / 31.5"
Resolution	2560 x 1440

PART NO.:

HS 322 UPB (Model No. HSG1408)

4 711404 023187

** USB 3.0: 1 upstream, 4 downstream, only one USB port for charging, Max 900mA

* "ADS" word mark / trademark and related patents on technologies belong to their respective owners.

Display Solutions